
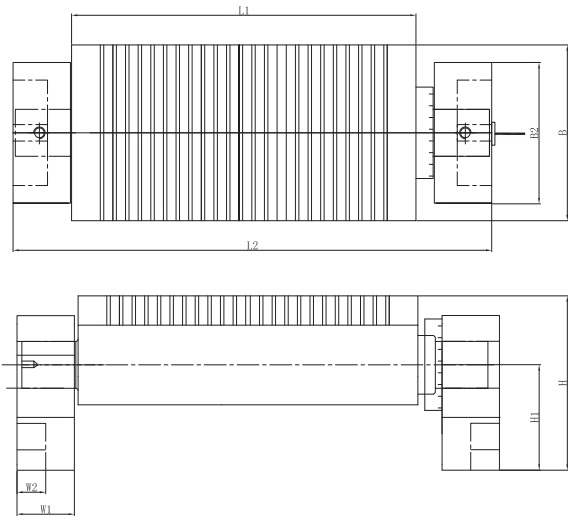


回转型电磁吸盘

ROTARY ELECTROMAGNETIC CHUCK

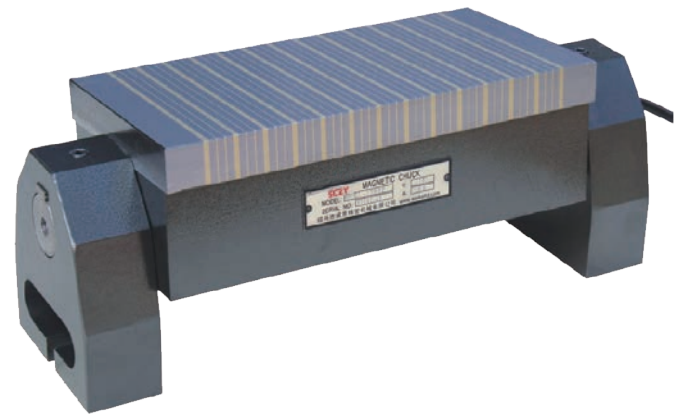

应用场景 /Application

用于角度磨削。
Clamping for angle grinding.



性能优势 /Product Features

- PR极距3+5+0.5+5+0.5+5。
- XR极距0.5+1.5mm。
- MR极距1+3mm。
- 最高磁力达到12kgf/cm²。
- 旋转主轴上附有刻度，易于各种角度的研磨。
- 吸盘与旋转主轴为一体，保证长期的高精度。
- 简易稳固的锁紧装置保证了加工精度。
- PR pole pitch 3+5+0.5+5+0.5+5mm.
- XR pole pitch 0.5+1mm.
- MR pole pitch 1+3mm.
- highest clamping force up to 120kgf/ cm².
- rotary shaft with graduation makes it easy to grind at any angle.
- Integrated chuck body and rotary spindle ensuring a long lasting accuracy.
- easily stable locking from the top ensure high precision work.

型号	外形尺寸(mm)							重量 (kg)
	面板宽 (B1)	面板长 (L1)	支撑座宽 (B2)	底座长 (L2)	总高 (H1)	中心高 (H2)	W2	W1
SCEMQC-1525PR	150	250	120	367	156	98	30	50
SCEMQC-1530PR	150	300	120	417	156	98	30	50
SCEMQC-1535PR	150	350	120	467	156	98	30	50
SCEMQC-1540PR	150	400	120	517	156	98	30	50
SCEMQC-2040PR	200	400	120	517	156	98	30	50

电控永磁吸盘(DYZ50密集型/DYZ70强力型)

ELECTRO PERMANENT MAGNETIC CHUCK (DYZ50/DYZ70)

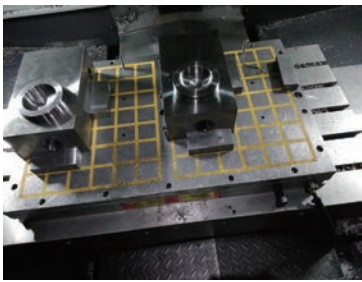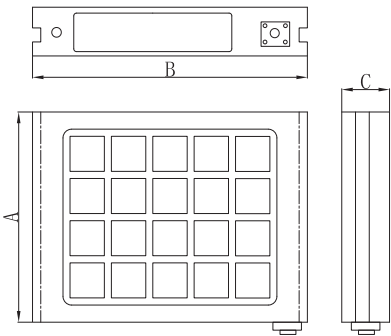

应用场景 /Application

适用于CNC切削中心，铣床，龙门铣床等切削作业。
For CNC milling center, milling machines, planomiller.

性能优势 /Product Features

- 本体与面板一体加工，极佳的钢特性，
- 精度高且稳定。
- 永久磁铁吸附工件，没有停电的危险性。
- 可配合定制导磁块，针对异形工件。
- 防水效果佳，保证不渗水，不漏电。
- 每极最大磁吸力可达350kgf以上。
- The body and plate are processed integrally, excellent steel character
- high precision and stable.
- permanent magnet attract workpiece, no danger if out of electricity.
- Irregular workpiece can be held with assistance of custom-made padding block.
- Waterproofness is good, no water seepage, no electric leakage.
- Max holding force of each pole can reach to 350kgf.

型号	外型尺寸 (mm)			磁极数		重量 (kg)
	A	B	C	50	70	
SCDYZ50-2540	250	430	68	18	8	52
SCDYZ50-2560	250	600	68	24	12	72
SCDYZ50-2580	250	810	68	33	16	99
SCDYZ50-25100	250	1000	68	42	20	120
SCDYZ50-3030	300	310	68	16	9	47
SCDYZ50-3040	300	430	68	24	12	65
SCDYZ50-3050	300	500	68	24	15	80
SCDYZ50-3060	300	600	68	32	18	90
SCDYZ50-3080	300	810	68	44	24	123
SCDYZ50-30100	300	1000	68	56	30	151
SCDYZ50-4040	420	430	68	36	16	92
SCDYZ50-4050	420	500	68	42	20	105
SCDYZ50-4060	420	600	68	48	24	126
SCDYZ50-4080	420	810	68	66	32	173
SCDYZ50-40100	420	1000	68	84	40	211
SCDYZ50-5060	500	590	68	56	30	144
SCDYZ50-5080	500	810	68	77	40	197
SCDYZ50-50100	500	1000	68	98	50	241
SCDYZ50-6060	600	600	68	64	36	180
SCDYZ50-6080	600	810	68	99	48	246
SCDYZ50-60100	600	1000	68	126	60	301
SCDYZ50-8080	800	810	68	121	72	310