


细目电磁吸盘 (M)

MICRO PITCH ELECTROMAGNETIC CHUCK

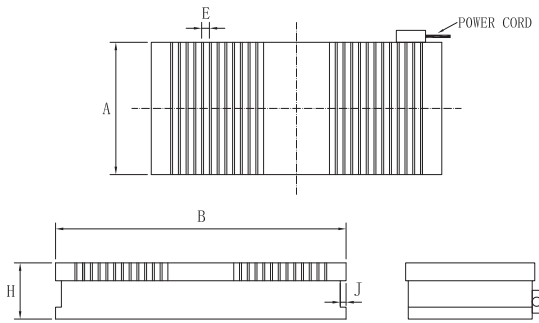

应用场景 /Application

适用于磨床，吸持微小扁平件。
Widely used in grinding machine, small and flat work piece.



性能优势 /Product Features

- 极佳的钢特性，减轻使用过程中的精度变化。
- 热变形小，精度高。
- 最大吸力可达12kgf/cm²以上。
- Excellent steel character, relieve precision change in using.
- Small thermal deformation, high precision.
- Maximum holding force can reach to 12kgf/cm².

型号	外形尺寸(mm)			E (极距) (mm)	DC电压 (V)	电流 (A)	重量 (kg)
	A	B	H				
SCEMQC-1530M	150	300	90	1+3	110V	0.77A	37
SCEMQC-1540M	150	400	90	1+3	110V	0.84A	45
SCEMQC-2040M	200	400	90	1+3	110V	1.20A	56
SCEMQC-2045M	200	450	90	1+3	110V	1.44A	62
SCEMQC-2050M	200	500	90	1+3	110V	1.56A	68
SCEMQC-2550M	250	500	90	1+3	110V	2.16A	85
SCEMQC-3060M	300	600	90	1+3	110V	2.28A	130
SCEMQC-30100M	300	1000	90	1+3	110V	3.36A	175
SCEMQC-4080M	400	800	90	1+3	110V	3.48A	200
SCEMQC-40100M	400	1000	90	1+3	110V	4.56A	230
SCEMQC-50100M	500	1000	90	1+3	110V	4.80A	255
SCEMQC-50120M	500	1200	90	1+3	110V	5.04A	285
SCEMQC-60100M	600	1000	90	1+3	110V	5.16A	310
SCEMQC-1540X	150	400	90	0.5+1.5	110V	0.84A	45
SCEMQC-2040X	200	400	90	0.5+1.5	110V	1.20A	56
SCEMQC-2045X	200	450	90	0.5+1.5	110V	1.32A	62
SCEMQC-2050X	200	500	90	0.5+1.5	110V	1.56A	68
SCEMQC-2550X	250	500	90	0.5+1.5	110V	2.04A	85
SCEMQC-3060X	300	600	90	0.5+1.5	110V	2.16A	130
SCEMQC-30100X	300	1000	90	0.5+1.5	110V	3.36A	175
SCEMQC-4080X	400	800	90	0.5+1.5	110V	3.48A	200
SCEMQC-40100X	400	1000	90	0.5+1.5	110V	4.56A	230
SCEMQC-50100X	500	1000	90	0.5+1.5	110V	4.80A	255
SCEMQC-50120X	500	1200	90	0.5+1.5	110V	5.04A	285

同心圆状圆形电磁吸盘

CIRCULAR ELECTROMAGNETIC CHUCK WITH CONCENTRIC POLES

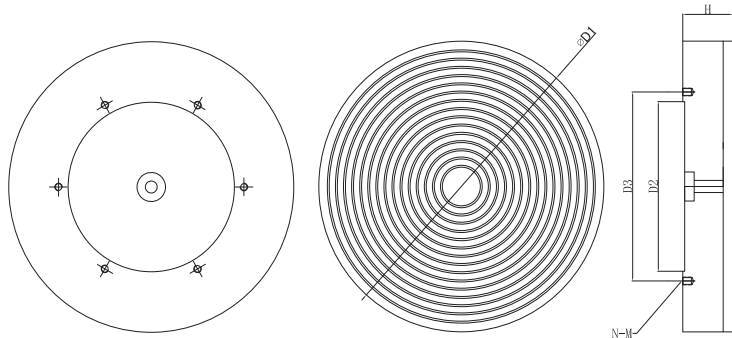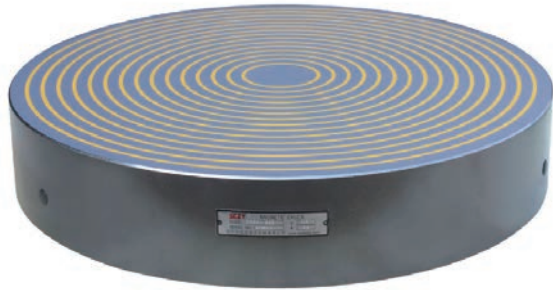


应用场景 /Application

用于吸持片状工件
Clamping for grinding of disc shaped workpieces

性能优势 /Product Features

- 极距3+6mm。
- 最高磁力达到12kgf/cm²。
- 高精度无缝结构的面板。
- 真实的磁极极性。
- 结构坚固且防水。
- 整体式底座使得机械变形最小。
- Pole pitch 3+6mm.
- highest clamping force up to 12kgf/cm².
- gap free construction pole plate.
- Real magnetic poles.
- coolant and water proof structure.
- minimum mechanical deformation with
- solid one-piece housing.

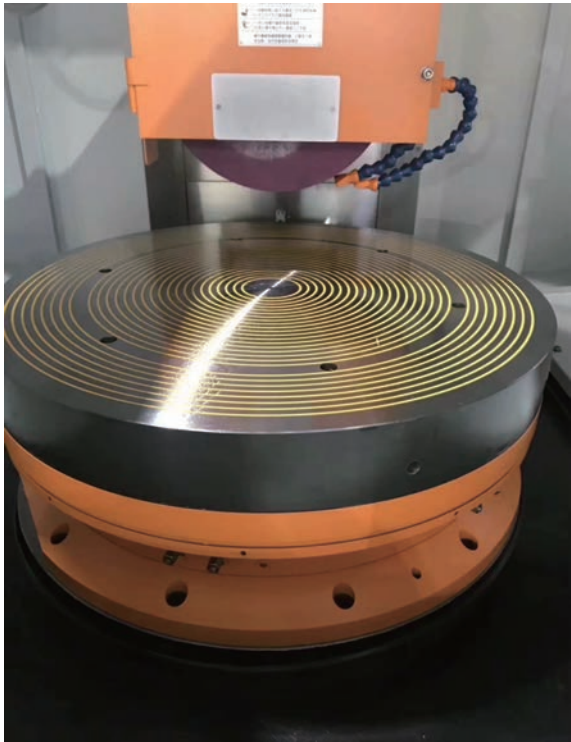

型号	外形尺寸(mm)			n	M	电压	重量 (kg)
	直径D1	高度H	D2 D3				
SCEMQC-Φ300A	300	90	160 190	4	12	DC110V	42
SCEMQC-Φ400A	400	105	210 250	6	12	DC110V	92
SCEMQC-Φ500A	500	105	280 320	6	12	DC110V	144
SCEMQC-Φ600A	600	105	350 390	6	12	DC110V	208
SCEMQC-Φ800A	800	105	450 500	6	16	DC110V	369
SCEMQC-Φ1000A	1000	105	550 620	8	16	DC110V	577