


BHE MB

用于MB模块式连接系统的精镗头，最小调节直径为10 μ m，游标微调值为2 μ m

10 μ m
2 μ m

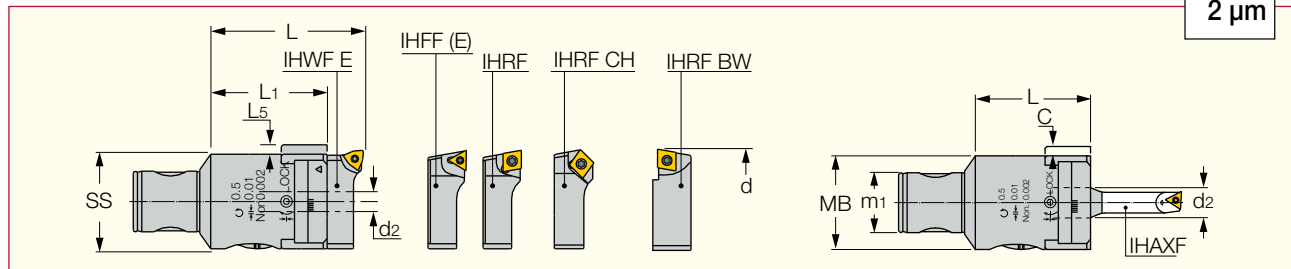

型号	SS	d _{min}	d _{max}	L	L ₁	L ₅	d ₂	Kg
BHE MB14-14X30	MB14	14.5	18.0	30.00	22.0	1.00	-	0.09
BHE MB16-16X34	MB16	18.0	24.0	34.00	26.0	2.00	-	0.10
BHE MB20-20X40	MB20	22.0	30.0	40.00	31.5	3.00	-	0.15
BHE MB25-25X50	MB25	28.0	40.0	50.00	40.0	3.00	-	0.23
BHE MB32-32X63	MB32	35.0	53.0	63.00	51.5	4.00	8.00	0.42
BHE MB40-40X80	MB40	48.0	66.0	80.00	66.0	5.00	-	0.83
BHE MB50-50X80	MB50	6.0	110.0	80.00	61.0	5.00	16.00	1.15
BHE MB63-63X89	MB63	6.0	125.0	89.00	69.5	10.00	-	2.13
BHE MB80-80X104	MB80	6.0	200.0	104.00	85.0	12.00	-	3.83

• 镗头选用指南，见 F6-7, F39, F41-43 • 备件见 F56, F57, F90-91.

刀夹页码: IHAXF (F53) • IHAXF-AVI (F54) • IHAXF-E (F55) • IHRF (F57) • IHRF (F58) • IHRF-BW (F62) • IHRF-CH (F63) • IHWFE (F58).

备件



型号	夹紧螺钉
BHE MB14-14X30	BH SR M3X3.5 DIN 913
BHE MB16-16X34	BH SR M3X4.5 DIN 913
BHE MB20-20X40	BH SR M3X4.5 DIN 913

BHE MB50-50X80




最小调节直径为10 μ m，
游标微调值为2 μ m



BHE MB-H

适用于高转速的精镗头，最小调节直径为10 μ m，游标微调值为2 μ m

10 μ m
2 μ m

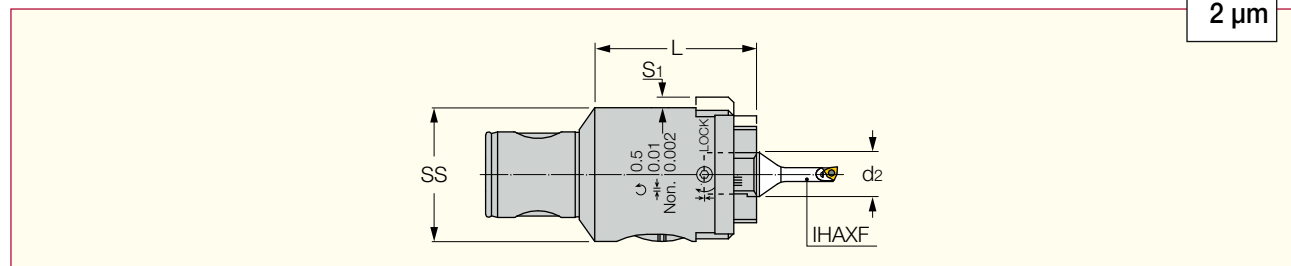






型号	SS	d _{min}	d _{max}	L	d ₂	S ₁	RPM _{max}	Kg
BHE MB32-32X53 H	MB32	2.5	18.0	53.00	8.00	3	12.000	0.42
BHE MB50-50X60 H	MB50	2.5	22.0	60.00	16.00	4	12.000	1.06

刀夹页码: IHAXF (F53) • IHAXF-AVI (F54) • IHAXF-E (F55).

精镗头镗削加工范围
最小调节直径为10μm，游标微调值为2μm

10 μm
2 μm


**BHE MB50-50x80
ø6-113.5**

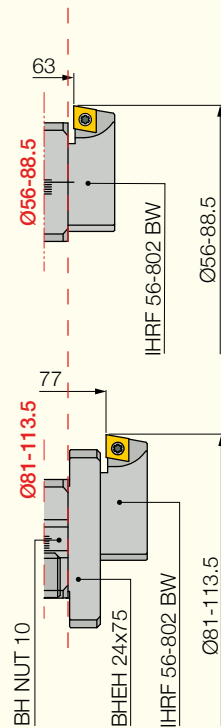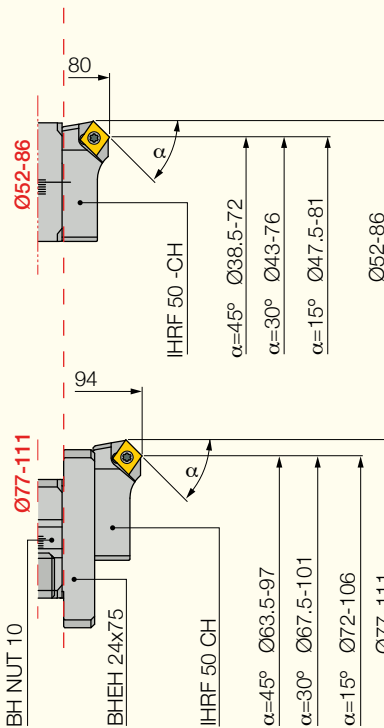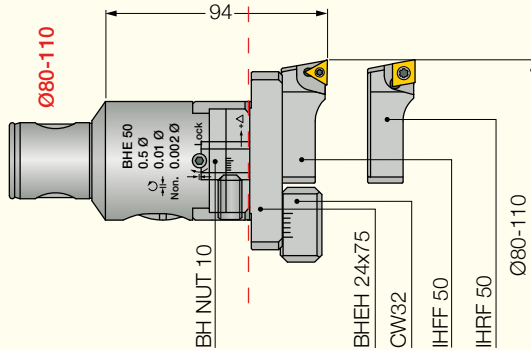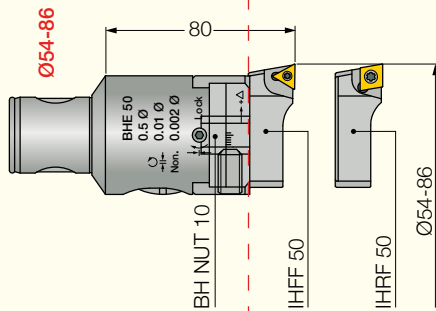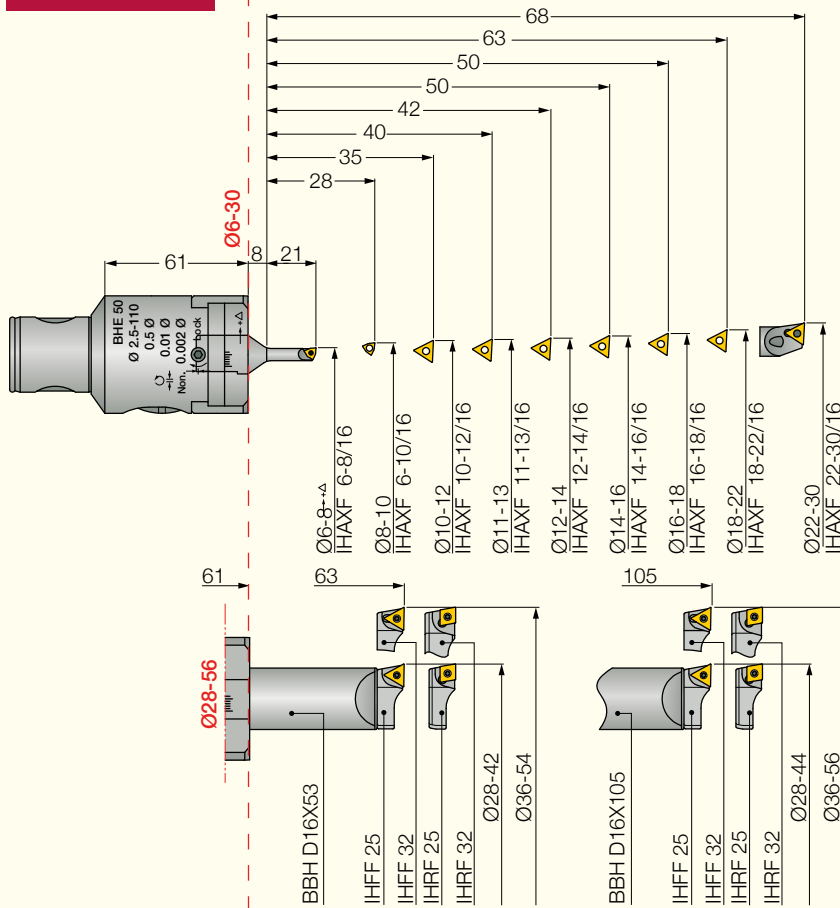

▲ 见 F98

精镗头镗削加工范围
最小调节直径为10 μ m，游标微调值为2 μ m

10 μm
2 μm

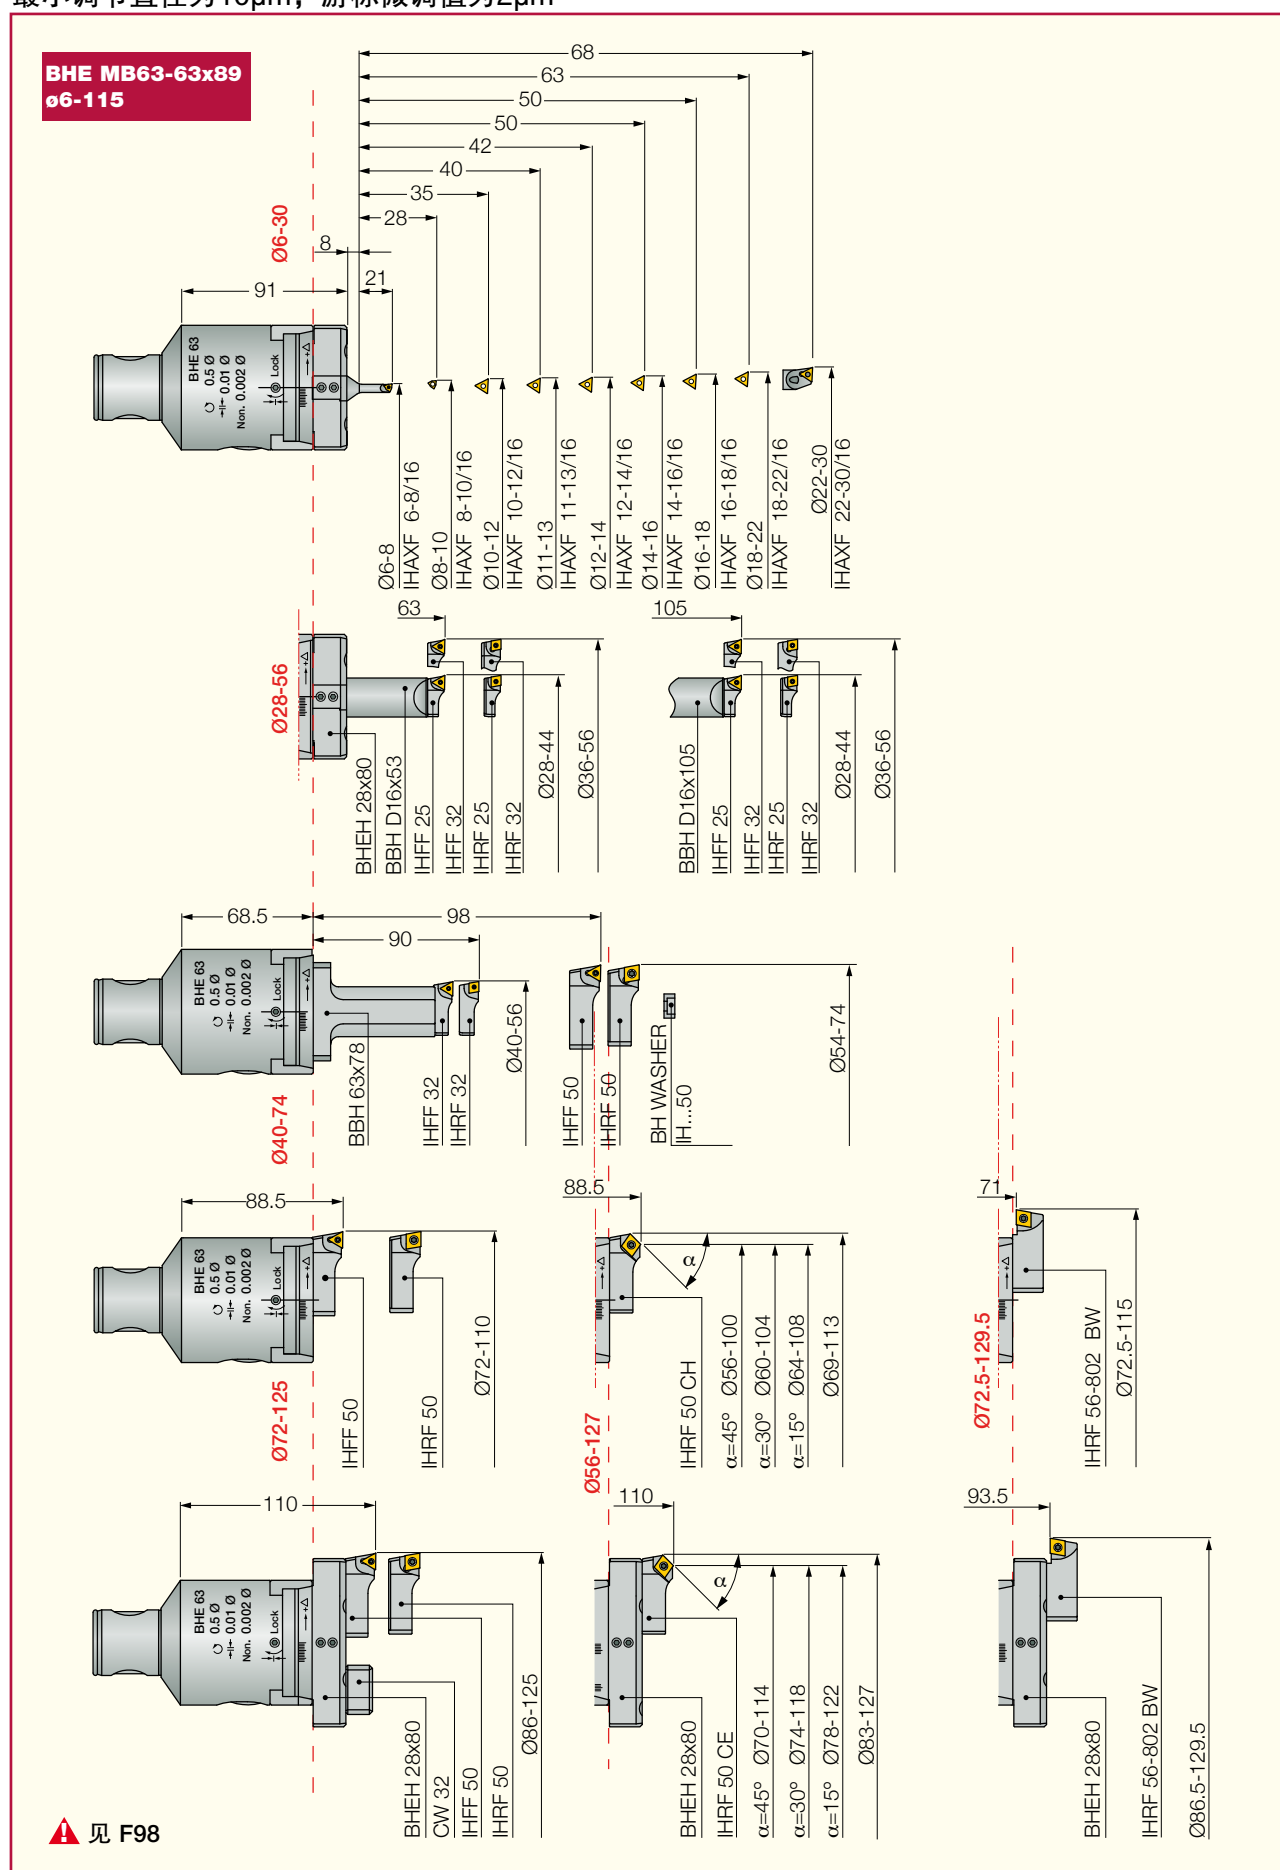

10 μm
2 μm

